




ABN 50 070 871 313

Innovative Control Systems, Design and Solutions

Jmax - Single Channel Triac Receiver

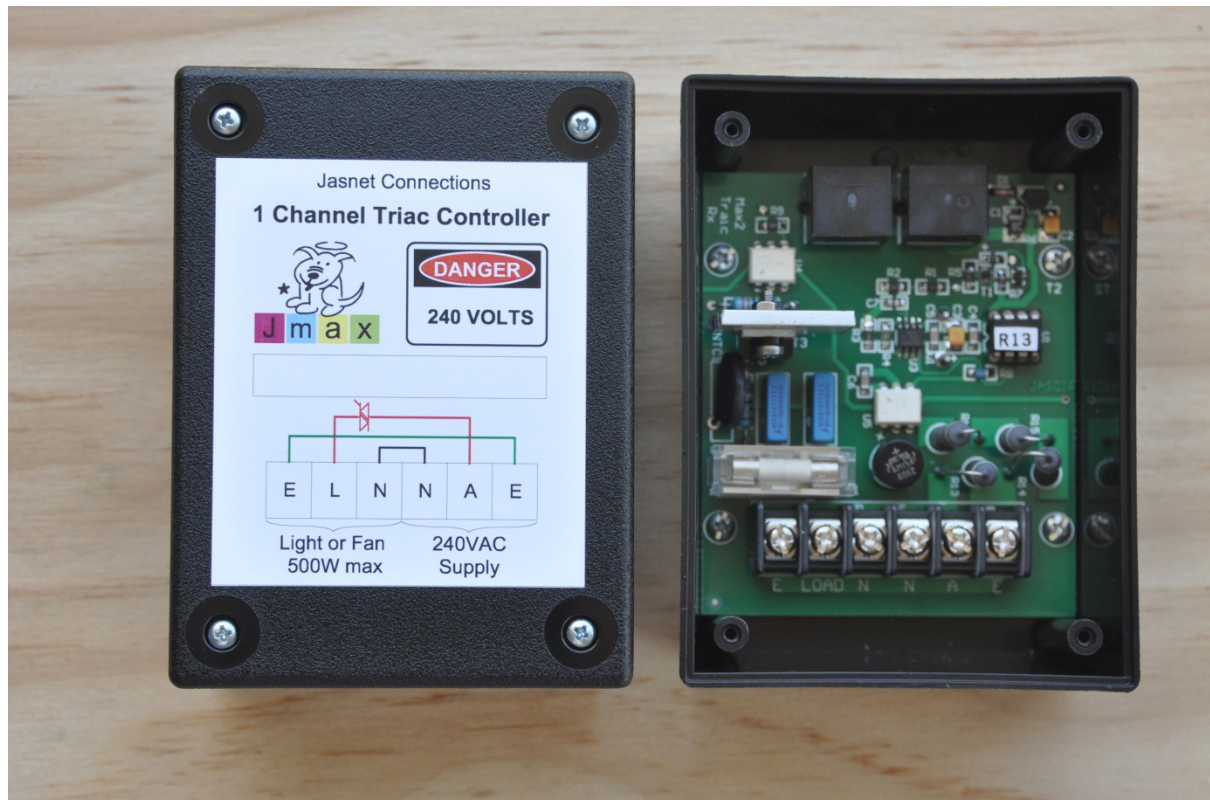

- Maximum load is 500 watts.
- High speed fuse protects the Triac against shorted loads.
- Triac may be phase angle triggered for variable voltage or zero crossing triggered dependant on the software used in each zones' microprocessor.
- The low voltage control circuitry is galvanically isolated from the 240VAC circuitry via opto couplers.
- This unit should only be installed by a licenced electrician, due to the lethal voltages that are present.
- It is suitable for mounting in a roof space adjacent to lights and fans.
- Connects to JasNet via Cat 5. (dual cat 5 connections for looping)
- Housing dimensions 83mm wide x 112mm high x 50mm deep.